


DRAWING FOR CUSTOMER

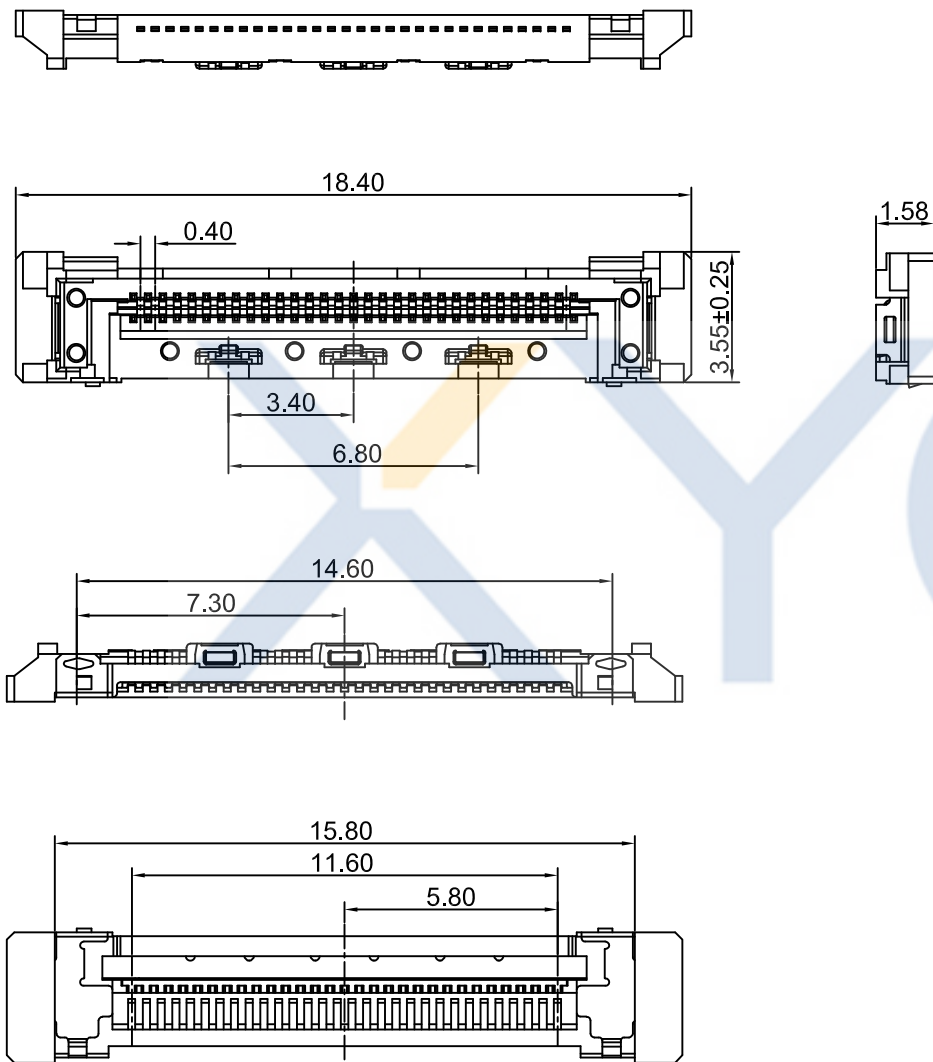

■SPEC.:

- Rated Voltage:100V AC,DC
- Rated Current:0.25A AC,DC
- Withstand Voltage:200V AC/minute
- Contact Resistance:100mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-40 °C ~+85 °C

■Material:

- Insulator:LCP UL94V-0,Black
- Contact Pin: Copper alloy
Finish:Gold-plated,over Nickel
- Shell:Stainless steel
Finish:Gold-plated ,over Nickel.

KB405- 30 H 4 A

Pin No.

Version

Housing

Mold No.

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差 .X=±0.30 .XX=±0.20 .XXX=±0.10	DRAWING 設計者	Devin	KB405-30H4A
2014-02-21	A		KB405-30H4A	Devin		CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號
								PE2108010A

UNIT 單位	mm	PRODUCT NAME 產品名稱	USLS PH0.40mm 30PIN Wire To Board Connector
------------	----	----------------------	---